



HRC Coupling

Semi-elastic General Purpose Coupling

Permitting quick and easy installation by means of Taper Lock® bushes, and offering quick alignment, the semi-elastic general purpose HRC coupling is ideal for use with electric motors.

Benefits

- > Offers the simplest, most straightforward fitting available
- > Ease of alignment and fitting using straight edge and machined outside diameters
- > Fail-safe design due to interacting dog design
- > Accommodates incidental misalignment
- > Exceptional performance at low cost
- > Power ratings are matched to standard motor sizes
- > Standard and FRAS elements available
- > Flywheel fixing variant available
- > Pilot bore design also available




Pioneered by Fenner

Size Reference

Size reference	Maximum bore size in mm	
	Taper lock bush	Bore and keyed
70	25	32
90	28	42
110	42	55
130	42	60
150	50	70
180	60	80
230	75	100
280	100	115

Construction

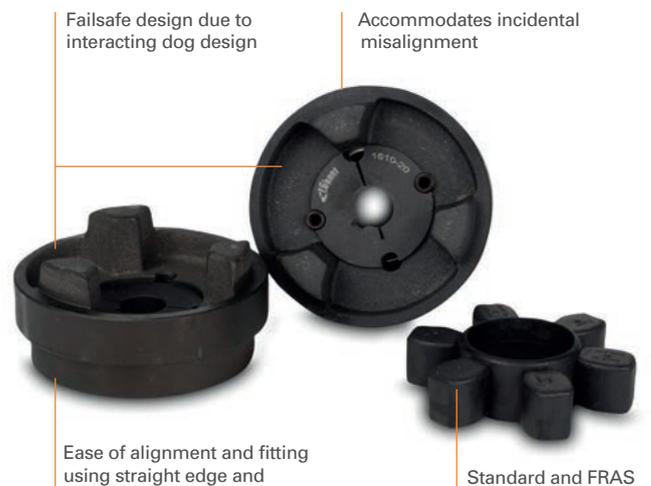

Reliable | Trusted | Connected



FPT Far East Pte. Ltd

29 Changi South Avenue 2 #04-00, ABV Building, Singapore 486444

(65) 6545 6630 (65) 6545 7730 / 7720 sales@fpt.com.sg www.fpt.com.sg

